


# KIWI 1620 2D



|                                   |   |
|-----------------------------------|---|
| Capacity Gross / Net (L)          | 1555 L / 1432 L                           |
| Outer Dimensions (WxDxH) mm       | 1620 x 780 X 2082                         |
| Internal Dimensions (WxDxH) mm    | 1534 X 636 X 1594                         |
| Temperature Range (°C)            | +1°C/+7°C                                 |
| Refrigerant / Voltage / Frequency | R290 / 220-240 V / 50 Hz                  |
| Thermostat                        | Digital                                   |
| Glass                             | Double tempered + LOW-E + ARGON           |
| Door Frame                        | FRAMELESS -full glass /aluminium sides    |
| Int. & Ext. Body                  | Galvanised 0,5mm sheet metal              |
| Cooling System                    | Ventilated                                |
| Evaporator Type                   | Fin Type                                  |
| Condenser Type                    | Dust Free /Maintenance free               |
| Lightening                        | LED horizontal & Vertical + on/off switch |
| Self Closing Door                 | Yes                                       |
| Insulation                        | 43 mm                                     |
| Shelves                           | 4+4 / PE coated + price holder            |
| Adjustable Feet / Roller          | 3x adjustable feet + 6x Roller            |
| 20DC/40DC-HC/Truck                | 10 / 21 / 24                              |

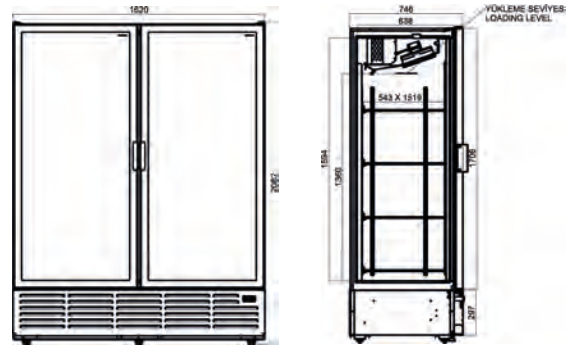

## Options

- Door lock
- Branding
- Castor
- Automatic defrost
- Lightening from door



KIWI 1620 3D 3M2



**2665 kWh/annum**

**2.22 m³**

**7°C**  
**-1°C**

|            |            |            |            |
|------------|------------|------------|------------|
| Inner Body | Outer Body | Outer Body | Outer Body |
| RAL 9002   | RAL 9002   | RAL 9005   | RAL 7016   |
| STANDARD   | STANDARD   | OPTIONAL   | OPTIONAL   |