


KIWI M&D 1270



Capacity Gross / Net (L)	1200 L / 1103 L
Outer Dimensions (WxDxH) mm	1270 X 805 X 2082
Internal Dimensions (WxDxH) mm	1184 X 636 X 1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lightening	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 4x Roller
20DC/40DC-HC/Truck	12/ 27 / 30

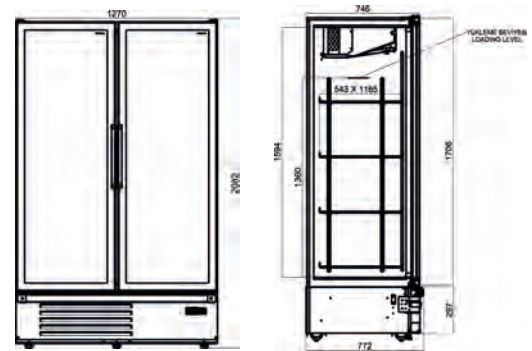

Options

- Branding
- Castor
- Lightening from door



KIWI 1270 3M0



2336 kWh/annum

1.66 m²

4°C
-1°C

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAL 9002	RAL 7016	RAL 9005	RAL 9005	RAL 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL