


KIWI M&D 1620 2D



Capacity Gross / Net (L)	1555 L / 1432 L
Outer Dimensions (WxDxH) mm	1620 X 805 X 2082
Internal Dimensions (WxDxH) mm	1534 X 636 X 1594
Temperature Range (°C)	-1°C/+2°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin type with hot gas defrost
Condenser Type	Dust Free /Maintenance free
Lightening	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4+4 / PE coated + price holder
Adjustable Feet / Roller	3x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	10 / 21 / 24

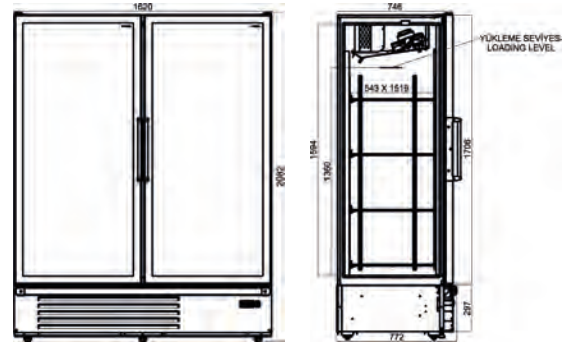

Options

- Branding
- Castor
- Lightening from door



KIWI 1620 2D 3M0



2993 kWh/annum


2.22 m³

 4°C
-1°C

Inner Body	Outer Body	Inner Body	Outer Body	Outer Body
RAI 9002	RAI 7016	RAI 9005	RAI 9005	RAI 9002
STANDARD	STANDARD	OPTIONAL	OPTIONAL	OPTIONAL