


KIWI M&D 1620 3D



| | |
|-----------------------------------|---|
| Capacity Gross / Net (L) | 1555 L / 1432 L |
| Outer Dimensions (WxDxH) mm | 1620 X 805 X 2082 |
| Internal Dimensions (WxDxH) mm | 1534 X 636 X 1594 |
| Temperature Range (°C) | -1°C/+2°C |
| Refrigerant / Voltage / Frequency | R290 / 220-240 V / 50 Hz |
| Thermostat | Digital |
| Glass | Double tempered + LOW-E + ARGON |
| Door Frame | FRAMELESS -full glass/aluminium sides |
| Int. & Ext. Body | Galvanised 0,5mm sheet metal |
| Cooling System | Ventilated |
| Evaporator Type | Fin type with hot gas defrost |
| Condenser Type | Dust Free /Maintenance free |
| Lightening | LED horizontal & Vertical + on/off switch |
| Self Closing Door | Yes |
| Insulation | 43 mm |
| Shelves | 4+4+4 / PE coated + price holder |
| Adjustable Feet / Roller | 3x adjustable feet + 6x Roller |
| 20DC/40DC-HC/Truck | 10 / 21 / 24 |

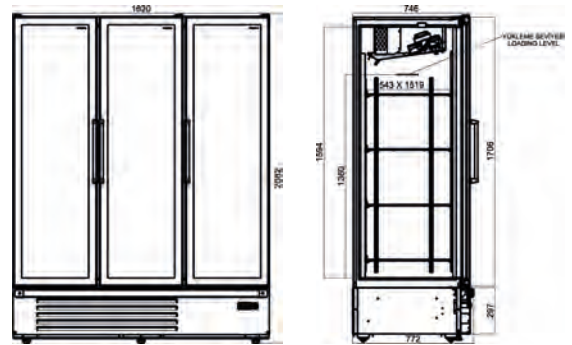

Options

- Branding
- Castor
- Lightening from door



KIWI 1620 3D 3M0



2993 kWh/annum

2.22 m³

4°C
-1°C

| | | | | |
|------------|------------|------------|------------|------------|
| Inner Body | Outer Body | Inner Body | Outer Body | Outer Body |
| RAL 9002 | RAL 7016 | RAL 9005 | RAL 9005 | RAL 9002 |
| STANDARD | STANDARD | OPTIONAL | OPTIONAL | OPTIONAL |