


# KIWI PREMIUM 1910 4D



Capacity Gross / Net (L)	1850 L / 1630 L
Outer Dimensions (WxDxH) mm	1910 X 792 X 2082
Internal Dimensions (WxDxH) mm	1824 X 636 X 1594
Temperature Range (°C)	+1°C/+7°C
Refrigerant / Voltage / Frequency	R290 / 220-240 V / 50 Hz
Thermostat	Digital
Glass	Double tempered + LOW-E + ARGON
Door Frame	FRAMELESS -full glass/aluminium sides
Int. & Ext. Body	Galvanised 0,5mm sheet metal
Cooling System	Ventilated
Evaporator Type	Fin Type
Condenser Type	Dust Free /Maintenance free
Lightening	LED horizontal & Vertical + on/off switch
Self Closing Door	Yes
Insulation	43 mm
Shelves	4x4 / PE coated + price holder
Adjustable Feet / Roller	4x adjustable feet + 6x Roller
20DC/40DC-HC/Truck	9 / 18 / 20

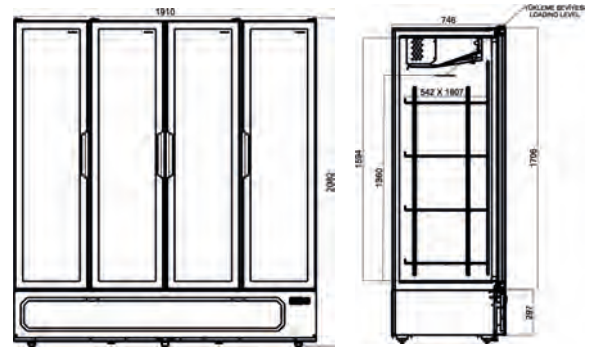

## Options

- Door lock
- Branding
- Castor
- Lightening from door
- Automatic defrost
- Lightened front grill



KIWI PREMIUM 1910 3D



**3796 kWh/annum**

  
**2.49 m<sup>3</sup>**

  
**4°C**  
**-1°C**

Inner Body	Outer Body	Inner Body	Outer Body
RAL 9005	RAL 9005	RAL 9002	RAL 7042
STANDARD	STANDARD	OPTIONAL	OPTIONAL